

# FOXTAM PANEL MOUNTED AUDIBLES

**TYPES: SC01-428, SX01-428, SY01-115  
SC03-115, SC03-250, SP03-250**

PRODUCT  
GROUP  
**N**

## ■ FEATURES

- Solid state
- No moving parts
- No RF noise or electrical interference
- Ideal for hostile environments

## ■ DESCRIPTION

Sonartones are panel mounted audible alarms, inexpensive and rugged that cannot be ignored. They produce a penetrating sound, with a volume of between 80-95dB this can be varied by adjusting the supply voltage. Both continuous and pulsating tone units are available in a wide range of AC and DC supply voltages. Connections are via a pair of 0.8 x 6.3mm male push on terminals, also tapped with fitted screws. **Note: dedicated DC voltage audible's are polarity sensitive and will not operate if the DC voltage is applied in reverse direction, damage is also likely to occur.**

## ■ SPECIFICATIONS

Operating temperature:	-30°C to +60°C
Humidity:	95%RH/40°C max (for 100 hours)
Voltage tolerance:	+15% Max
Life test continuous:	300 hours
Life test intermittent:	1 min on, 5 min off duty cycle 1000 times
Intensity:	80-95dB at 1 meter
Housing material:	Self-extinguishing nylon

## ■ MOUNTING


Mounting is via the rear of the panel with a maximum panel thickness of 6.3mm a clearance hole size of 29mm diameter is required.

## ■ ORDERING INFORMATION

<u>P/No</u>	<u>Voltage</u>	<u>Tone</u>	<u>Case size</u>
SC01-428	4-28VDC	Continuous	01
SX01-428	4-28VAC/DC	Continuous	01
SY01-428	4-28VAC/DC	Pulsating	01
SC03-115	30-120VAC/DC	Continuous	03
SC03-250	50-250VAC	Continuous	03
SP03-250	50-250VAC	Pulsating	01



## DIMENSIONS

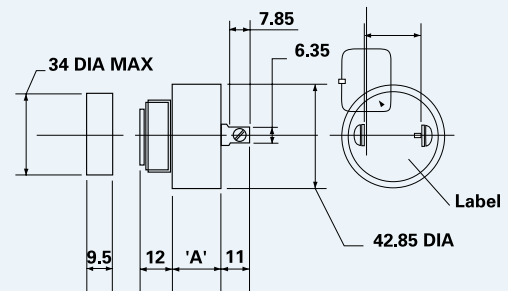

MODEL	DIMENSION 'A'
01	20.00
03	30.00