

FOX.SC23


FEATURES

- Protected terminals
- Integral cable / bus-bar pinch screws
- Primaries from 100 Amps to 400 Amps
- Max aperture size 23x33mm
- Max overall dimensions 93x103mm
- Class 1 (class 0.5 on request, some ratios)
- 1 Amp or 5 Amp secondaries



P/No.	CLASS	VA
FOX.SC23 100/5	1	1.5
FOX.SC23 150/5	1	1.75
FOX.SC23 200/5	1	2.5
FOX.SC23 250/5	1	3.75
FOX.SC23 300/5	1	5
FOX.SC23 400/5	1	6.25

1 Amp secondaries available to special order, along with class 0.5 on some ratios, please consult our sales office.

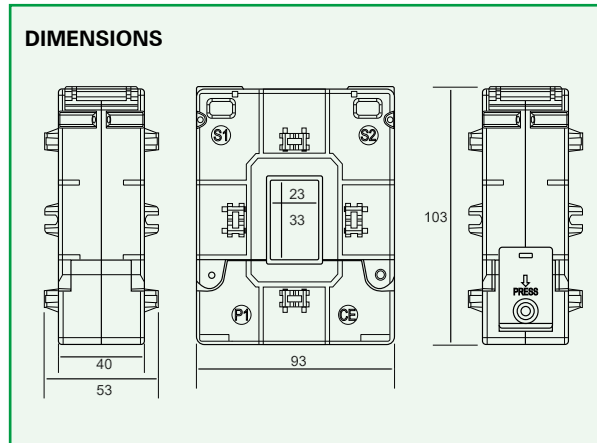

FOX.SC58

FEATURES

- Protected terminals
- Integral cable / bus-bar pinch screws
- Primaries from 250 Amps to 1000 Amps
- Max aperture size 82x52mm
- Max overall dimensions 125x158mm
- Class 1 (class 0.5 on request)
- 1 Amp or 5 Amp Secondaries



P/No.	CLASS	VA
FOX.SC58 250/5	1	2.5
FOX.SC58 300/5	1	3.75
FOX.SC58 400/5	1	3.75
FOX.SC58 500/5	1	5
FOX.SC58 600/5	1	7.5
FOX.SC58 800/5	1	10
FOX.SC58 1000/5	1	15

1 Amp secondaries available to special order, along with class 0.5 on some ratios, please consult our sales office.

