

Technical Data Sheet

ACS Azure Lintels

Header Bond

- ✓ **BS EN 845-2 Lintel Design**
- ✓ **BS EN 846-9 Lintel Testing**
- ✓ **BS 5977 Lintel Specification**
- ✓ **Accelerated Weather Tested**
 - Saturated Freeze-Thaw
 - Bond Strength - Pre & Post Weathered
 - Impact Strength - Pre & Post Weathered
- ✓ **Austenitic Stainless Steel**
 - Grade 304 (1.4301) 316 (1.4404)
- ✓ **CE Marked**



bre

Lintels tested by The
Building Research
Establishment

LUCIDEON

Brick Slip Bond Strength & Durability
Tested by Lucideon



BS EN 845-2
BS EN 1090



Meets the Requirement
of the NHBC Standards



Technical Data

The ACS Azure Header Bond Lintel Range is designed to allow an opening to be created in a single leaf of masonry, typically the external leaf of a cavity wall with an integrated brick slip soffit feature. The brick slip soffit feature is bonded to the lintel carrier using a specially formulated resin adhesive in a header/rowlock bond to create a brick feature at the soffits of windows or openings.

Design & Testing

Both the lintels and the brick slips have been independently tested by Notified and Technical Approval Bodies to evaluate and validate the load capacity, physical performance and long term durability of all components. The lintels have been designed in line with the requirements of BS EN 845-2 & BS 5977-1 and tested in line with BS EN 846-9. The brick slips are tested using the guidance of ETAG 034 to evaluate the accelerated Freeze/Thaw weather resistance both saturated and dried of the slips bonded to backing structures of various materials. The tests include the evaluation of bond strength and durability of the brick slips bonded to stainless steel where a service life of 60 years can be achieved. The bond strength and impact resistance of the brick slips was tested before and after the accelerated cyclic weather tests to validate the integrity and durability of the system. The tests included:

- Heat / Rain weathering to ETAG034 – Weathered samples only.
- Bond Strength testing using ETAG004 as guidance- Control and Weathered samples
- Impact testing to ISO 7892 - Control and Weathered samples


Technical Data Sheet

Installation

Lintels should always be propped during construction to achieve the safe working load capacities declared in the design tables below. A separate DPC is required above the lintel. Wall ties should be installed within 300mm of the lintel at a maximum of 450mm centres to ensure that the masonry carried by the lintel is restrained and any potential overturning and deflection is minimised.


The standard lintel range is supplied in 150mm incremental lengths. Lintels of alternative lengths and load capacities outside of the details provided in the following load tables can be designed and supplied to meet with project specific requirements. Lintels should be selected to ensure that a minimum of 150mm bearing either side of the opening is always achieved.

Standard Duty 'L' Section Lintel

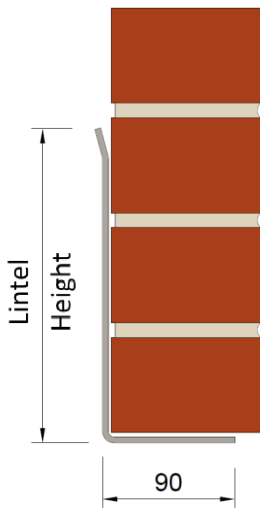

| L Section Lintels | | | | | | |
|-----------------------|----------|-----------|-----------|-----------|-----------|-----------|
| Standard Lengths (mm) | 600-1200 | 1201-1500 | 1501-2100 | 2101-3000 | 3001-3900 | 3901-4500 |
| Total UDL (kN) | 4 | 7 | 6 | 6 | 8 | 9 |
| Lintel Height (mm) | 88 | 131 | 167 | 215 | 215 | 215 |
| Weight / Metre (kg) | 2.90 | 3.58 | 4.16 | 4.93 | 7.37 | 9.79 |

Heavy Duty 'C' Section Lintel

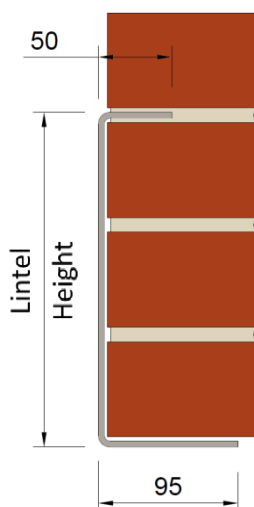

| C Section Lintels | | | | | | |
|-----------------------|----------|-----------|-----------|-----------|-----------|-----------|
| Standard Lengths (mm) | 600-1200 | 1201-1500 | 1501-2100 | 2101-3000 | 3001-3900 | 3901-4500 |
| Total UDL (kN) | 9 | 12 | 12 | 11 | 13 | 13 |
| Lintel Height (mm) | 154 | 229 | 229 | 229 | 229 | 229 |
| Weight / Metre (kg) | 3.59 | 4.28 | 4.86 | 5.63 | 8.38 | 11.10 |

LEEDS

Cross Green Approach
Cross Green Industrial Park
Leeds LS9 0SG

Tel: +44 (0)113 391 8200
Fax: +44 (0)113 391 8209

LONDON

Crown House
Home Gardens
Dartford

Tel: +44 (0)1322 424 510
Fax: +44 (0)1322 424 504

GLASGOW

Festival House
150 Brand Street
Glasgow G51 1DH

Tel: +44 (0)141 314 0048
Fax: +44 (0)141 314 0026

