




## CONCEALED SHOWER VALVE

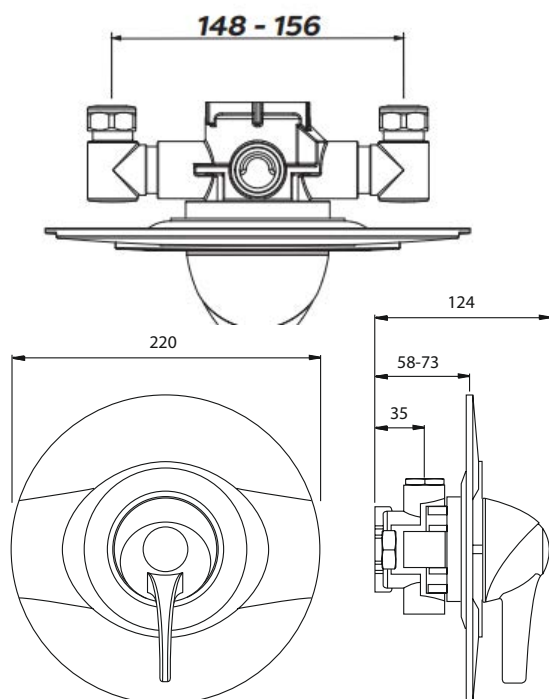

Flow Regulators not fitted

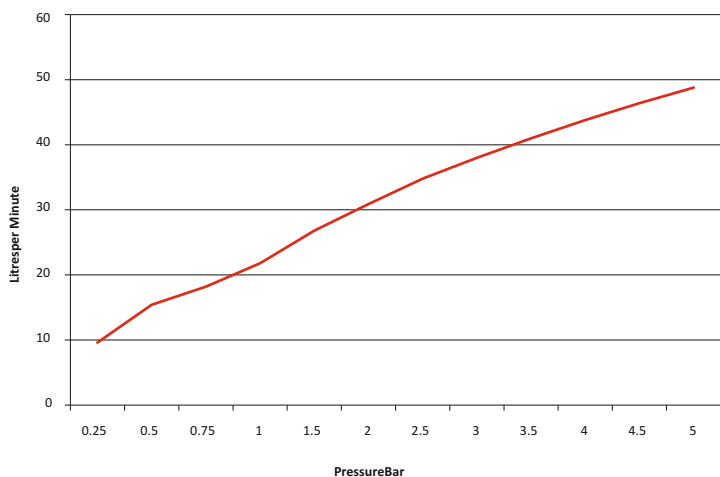

Flow Regulators Fitted

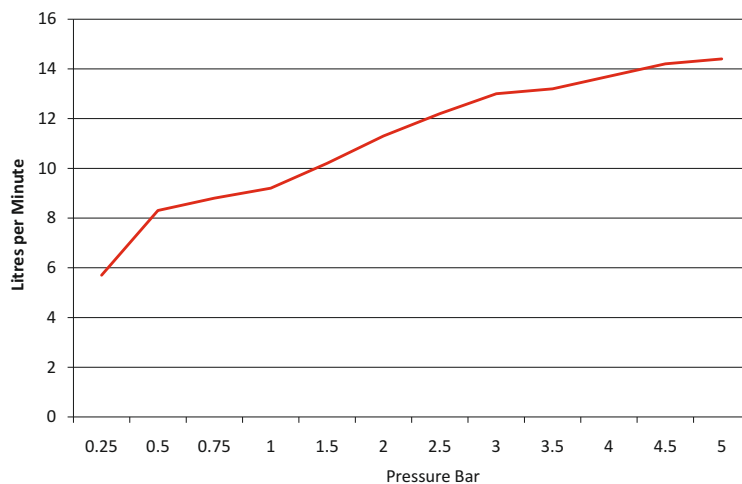

<b>Product Code</b>	<b>SHWRPKSPA4</b>
<b>Operating pressure</b>	0.2 to 5
<b>Material</b>	Stainless steel, polyester
<b>Colour</b>	Chrome

### Description:

This concealed valve has been developed by adopting the principles of inclusive design. Suitable for any user, regardless of their sight or dexterity

### Key features:

- Sequential control shower valve for combined control of temperature and flow
- Suitable for use with unvented supplies, combi boilers, gravity and mains pressure systems
- Single piece thermal cartridge technology
- Factory set at 43°C to prevent scalding and
- Temperature stability of  $\pm 2^{\circ}\text{C}$
- Fail safe on hot and cold supplies
- Operating pressure range of 0.2 to 5 bar
- TMV3 scheme approved
- Complies with HTM64
- WRAS approved

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary. Full information on guarantees available upon request.