

Atlas Pro

15MM THERMOSTATIC (TMV3) BLENDING VALVE CHROME




Product Code	TMVBLEND15
Colour	Chrome Finish
Weight (Kg)	3.5
Inlet Temperature Range	52°C - 65°C: Hot 05°C - 20°C: Cold
Maximum Inlet Temperature	85°C
Maximum Working Pressure	10 Bar : Static
Minimum Working Pressure	0.2 Bar : Dynamic

Key features:


- TMV3 approved
- Building Regulations Part G compliant
- Robust and Realible

Description:

This Blending valve delivers safe, blended hot water to taps, showers, bidets and other water outlets, making it ideal for use in hospitals, schools and leisure centres. The TMV has been independently tested and approved by the TMV3 scheme as a type 3 valve under the requirements of the NHS MES - D08

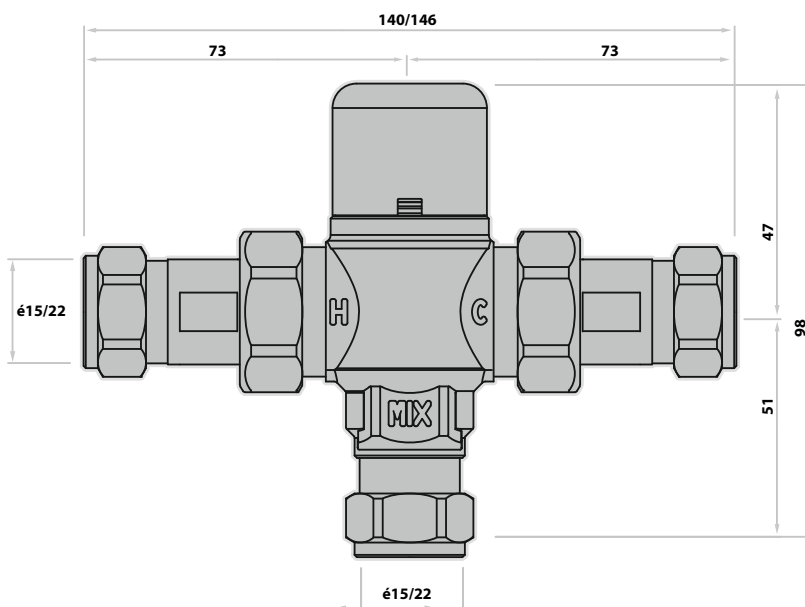

Flow Rates for 15mm Mixing Valves

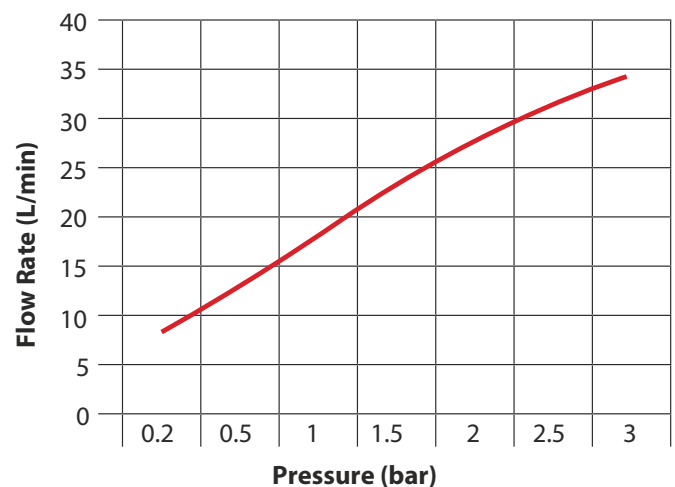

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary. Against manufacturers defects. Full information on guarantees available upon request.