

AQUA R ROUND THERMOSTATIC SHOWER VALVE 2



| | |
|---------------------|----------------|
| Product Code | TPAQR10 |
| Weight (Kg) | 1 |
| Material | Brass, ABS |
| Finish | Chrome |
| Min Pressure | 0.5 |
| Max Pressure | 5 |

Flow rates (litres per minute)

| 0.5 Bar | 1 Bar | 3 Bar |
|----------------|--------------|--------------|
| 7.6 | 10.9 | 18.9 |


*Shrouds not included. Use Aqua R easy fix kit with round shrouds - TPAQR14

Key features:

- Dual control
- 10 year guarantee*
- Thermostatic Cartridge
- 1/2" Quarter Turn Cartridge
- 150mm inlet centers
- Inlet connection: G 3/4"
- Outlet connection: G 1/2"

Description:

Dual controlled shower valve with flow and temperature. Controlled separately to give accurate control. The thermostatic cartridge maintains showering temperature to +/- 2c, giving a stable outlet temperature. Automatic shut-off in the event of cold water supply failure, to prevent scalding. Temperature factory set to a 38°C.

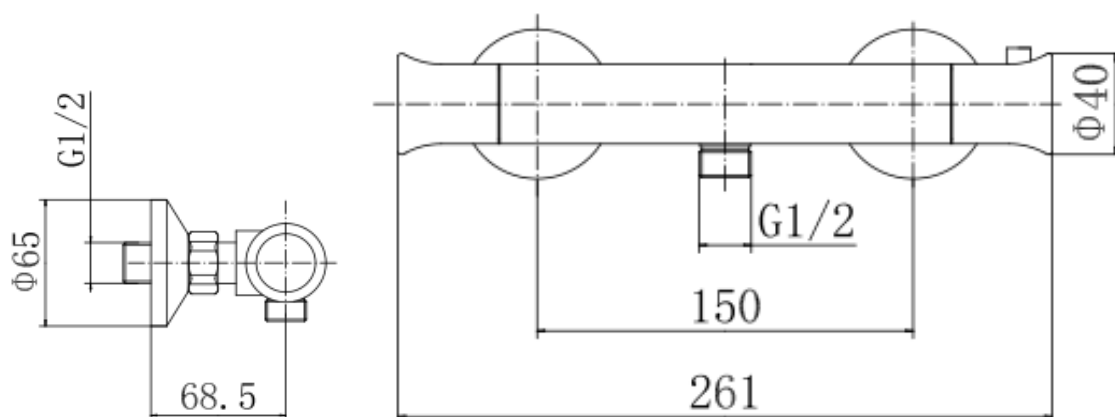

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary.
*Against manufacturers defects. Full information on guarantees available upon request.