

## THERMOSTATIC MIXER TAP TMV3 WITH COPPER TAILS



<b>Product Code</b>	<b>TPKIRTMV3</b>
<b>Colour</b>	Chrome Finish
<b>Weight (Kg)</b>	2.2
<b>Inlet Temperature Range</b>	Max 85°C Min 10°C
<b>Pre-set factory Temperature</b>	43°C
<b>Maximum Working Pressure</b>	10 Bar : Static
<b>Minimum Working Pressure</b>	0.2 Bar : Dynamic

### Flow rates

Below are flow rates in litres per minute,  
measured in laboratory test conditions


<b>0.2 bar</b>	7
<b>0.5 bar</b>	9
<b>1.0 bar</b>	13

### Key features:

- Integral Thermostatic mixing valve
- Self draining spout
- 5 year guarantee\*
- Copper inlet tails

### Description:

The lever operated sequential basin mixer tap is ideal for less able users. For safety, this tap can only start in the cold position. The flat lever allows the user to operate the tap, even with limited dexterity Available with long handle (TPKIRTMV3LONG).

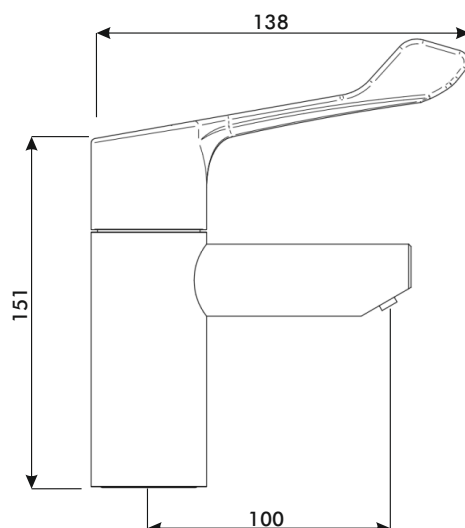

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary.  
\*Against manufacturers defects. Full information on guarantees available upon request.