

## MEDICAL SAFE TOUCH LEVER OPERATED THERMOSTATIC TAP (UNREMOVABLE SPOUT)




<b>Product Code</b>	<b>TPMEDNONREM</b>
<b>Colour</b>	Chrome Finish
<b>Weight (Kg)</b>	2.4
<b>Inlet Temperature Range</b>	Max 85°C Min 10°C
<b>Pre-set factory Temperature</b>	41°C
<b>Maximum Working Pressure</b>	10 Bar : Static 5 Bar: Dynamic
<b>Minimum Working Pressure</b>	0.2 Bar : Dynamic

### Key features:

- Lever and Infrared operated versions available
- Unique ergonomic design
- WRAS & TMV3 approved
- Full Safe Touch body
- Thermostatic control
- Integral isolation valves
- 5 year guarantee\*

### Description:

Our medical thermostatic taps are compliant with the Healthcare Performance Requirements and feature a long lever that can be operated without hand contact. Optional removable spout models available (TPMEDREM) for auto-claving, one piece removable cartridge, supply isolating valves accessible without removing from the wall/panel, simple sterilisation method, smooth internal surfaces and a flow outlet compliant with HBN00-10 Part C. Suitable for use with unvented water supplies, combi boilers, gravity and mains pressure systems. Infrared version available (TPMEDINFRA)  
Special Order product

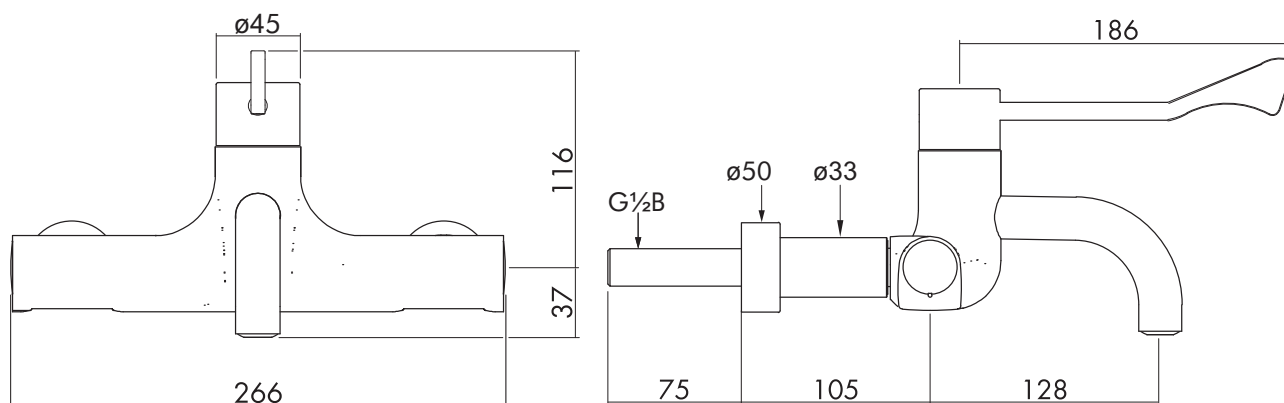

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary.  
\*Against manufacturers defects. Full information on guarantees available upon request.