

Atlas Pro

INFRA-RED EXPOSED FLUSH VALVE



Product Code	URIRFLUSH
Weight (Kg)	0.5
Material	Mixed metals
Waterless	No
Colour	Silver
Flushing mechanism	Infra-red



Key features:

- Water saving
- Touch free operation
- Battery life approximately 220,000 cycles
- Bistable solenoid
- 24hr none usage auto flush feature

Description:

This Infra-red urinal flush control is ideal for public toilets and washrooms. When the sensor detects a user's presence for longer than 10 second, the integrated solenoid valve turns on a timed flow of water. This removes the need for any physical contact with the flushing device lowering the chances of coming to contact with unhygienic surfaces.

Max Inlet Pressure (static)	8 Bar
Min Operating Pressure (dynamic)	1 Bar
Max Inlet Temperature	70°C
Power Supply	6V lithium battery
Auto flush feature operates after 24 hours of non usage	

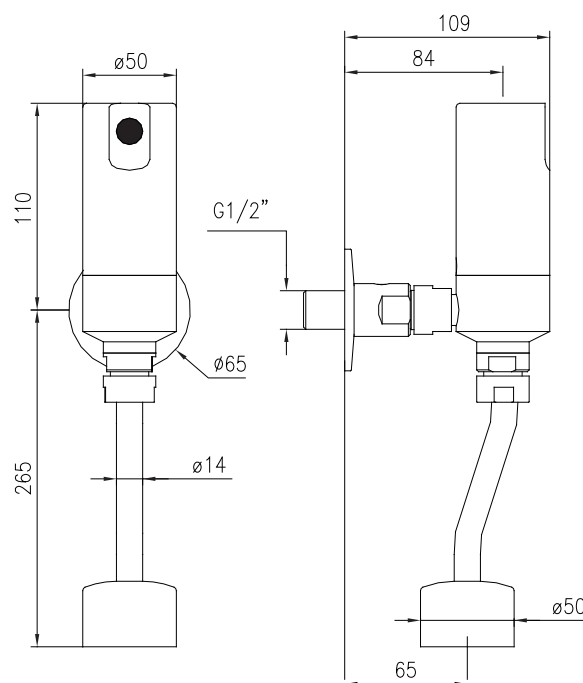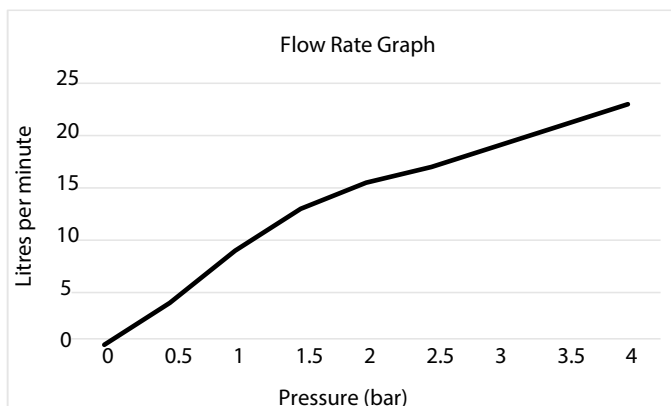

All dimensions are approximate and subject to normal ceramic variation. Although every effort is made not to change the above product specification, Lecico reserve the right to do so without prior notification if necessary. Full information on guarantees available upon request.