

NOR400

NORSEAL



Application

Fire resisting and acoustic timber doorsets,
40-80mm thick

Fixing

Bolted together

Performance

Fire resistance in accordance with BS 476-22
Anti-snap flap with 180 degree opening
A4 aperture to BS 2911
Salt spray tested to BE EN 1670 - Class 5
Sound reduction up to 95% of door's fully caulked
performance (FCP) when used in conjunction with
appropriate Norsound seals
30,000 cycle tested

Material

High quality Zinc

Size (mm)

310x76 (278x44 internal dimension)


Colours

Polished Chrome (**PC**) / Satin Chrome (**SC**) / Gold
(**GLD**) / Other finishes on application

Order codes

NOR400 + Colour

eg. **NOR400SC** (Satin chrome)

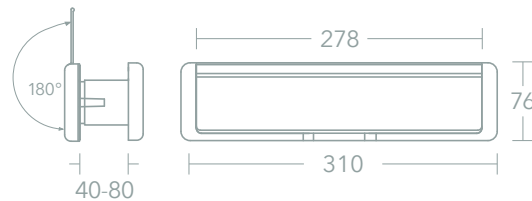

 5 Regents Drive
Prudhoe
Northumberland
NE42 6PX

 norseal.co.uk

 sales@norseal.co.uk

 01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08