


## NOR810®

NORSOUND BY NORSEAL

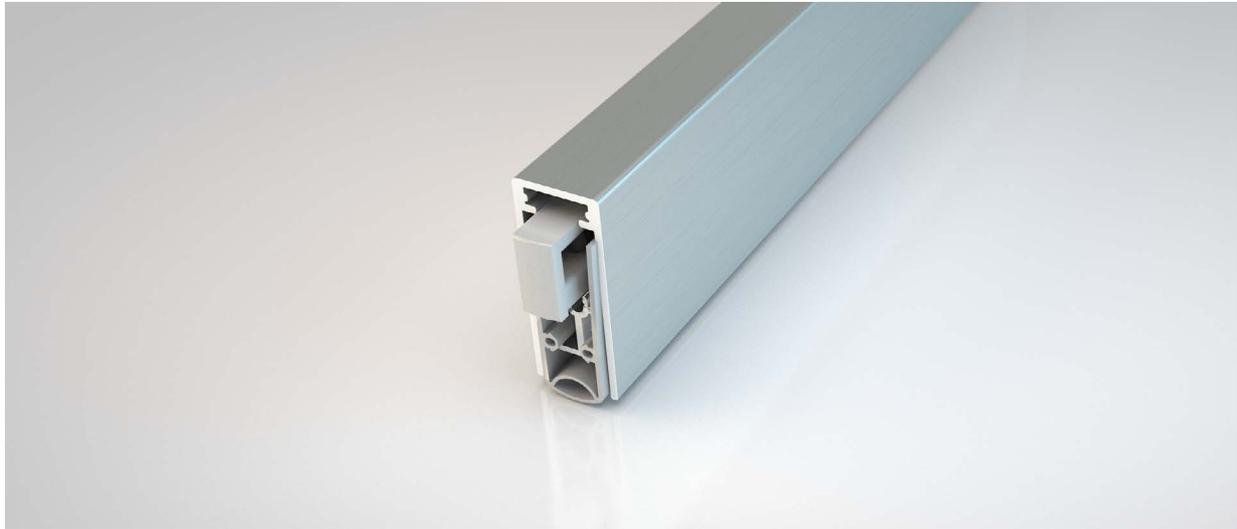

### Application

Bottom edge of acoustic timber doorsets

### Fixing

Rebated, held in place with end caps

### Performance

Suitable for use on most fire doors  
Compliant with BS 476-22  
UL Approval  
Smoke tested in accordance with BS 476-31.1  
Acoustically tested in accordance with BS EN ISO 10140-2  
Certifire CF629  
1,000,000 cycle tested

### Material

Aluminium, Silicone gasket

### Standard lengths (mm)

320, 435, 535, 635, 735, 835, 935, 1035, 1135, 1235, 1335, 1435, 1535

### Minimum / Maximum length (mm)

320 / 1700

### Gap coverage (mm)

20

### Actuation

Single

### Cutback (mm)

Various, >100, 320 limited to 85


### Colour

Mill finish, Grey gasket

### Order codes

**NOR810 + Length** eg. **NOR810320** (320mm)

### Dimensions



 5 Regents Drive  
Prudhoe  
Northumberland  
NE42 6PX

 [norseal.co.uk](http://norseal.co.uk)

 [sales@norseal.co.uk](mailto:sales@norseal.co.uk)

 01661 830088

Registered in Companies House Cardiff No. 04317595 VAT Reg. No. 733 9466 08