



Fitting Instructions

TENMAT's FF102/25 Ventilated Fire Barrier is a particularly versatile and extensively fire tested Ventilated Fire Barrier which can be installed in a wide range of construction types. The product is simply mechanically fixed in position to leave up to a maximum 0.827" / 21mm air gap. Check with **TENMAT** if a greater air gap is required.

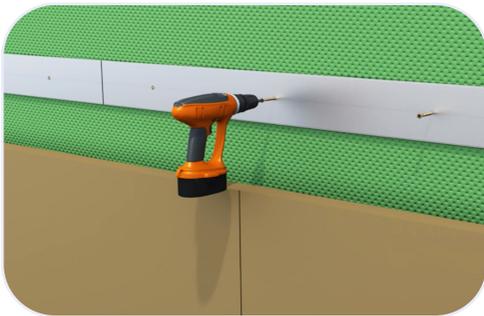

- Fix FF102/25 with non-combustible stainless steel nails or screws.
- Maximum screw head diameter is 0.45" / 11.5mm (trumpet/countersunk type head only).
- Product must be fixed at maximum 10" / 250mm centres.

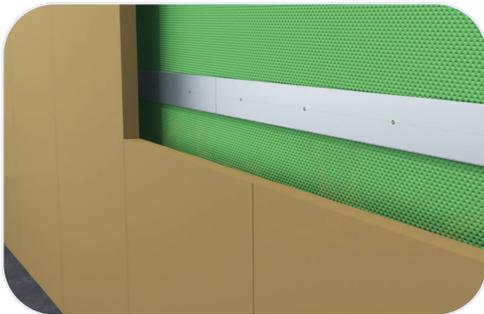

- If the product is cut to length, ensure minimum two fixing per cut length.
- Fixings must be along center line of the Fire Barrier.
- Ensure label side is facing out into cavity.
- Adjacent lengths must be tightly butted.



- Maximum remaining air gap to the back of the cladding panel is 0.827" / 21mm.
- Ensure Fire Barrier is free to expand in a fire situation.