




New

Film



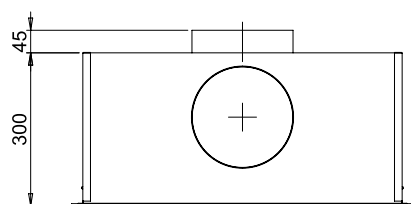
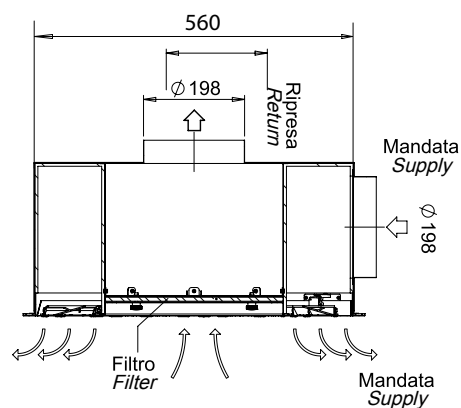
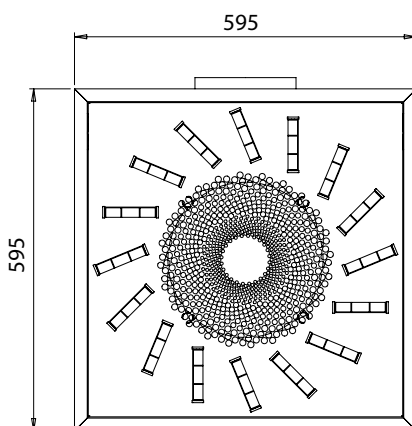
PREZZI / PRICES

	NMF
BxH (mm)	€
595x595	-

N.B.: Prezzi con filtro incluso

N.B.: Prices with filter included

DISEGNI / DRAWINGS

**Caratteristiche:**

Diffusori di mandata e ripresa a flusso elicoidale con getti regolabili e plenum multifunzione.

Costruzione:

Diffusore in acciaio verniciato bianco RAL 9010 con deflettori in polipropilene nero RAL 9005. Plenum in acciaio zincato a doppio flusso con isolamento anticondensa.

Impiego:

A soffitto di mandata e ripresa (contemporanea).

Altezza di installazione 2,5 - 4,1 m.

Fissaggio:

Fissaggio a controsoffitto.

Characteristics:

Supply and return swirl diffuser with adjustable throws and multifunction plenum.

Construction:

RAL 9010 white painted steel diffuser with deflection blades made of polypropylene RAL 9005 black. Double flow plenum made in insulated galvanized steel.

Utilization:

For modular false-ceiling installation for contemporary air supply and return.

Installation height 2,5 - 4,1 m.

Fixing:

Fixing on false-ceiling.

Modello Model	A _x [m²]	P [m³/h]		L _{WA} [dB(A)]		X _{0,20} [m]		D _{Pt} [Pa]	
		min	max	min	max	min	max	min	max
NMF	0,0189	160	375	24	33	2,2	4,3	10	50