



CENTRALISED HEAT RECOVERY UNIT

APPLICATION

Whole-house heat recovery unit, suitable for ceiling or false-ceiling installation, for horizontal mounting.

SPECIFICATION

Outer fan casing manufactured from powder coated galvanised sheet steel providing long lasting and robust construction. The unit is finished in white RAL 9010.

Internal structure manufactured from EPP (expanded polypropylene) providing reduced sound emissions and maximised air tightness and thermal insulation.

EC external rotor motors fitted as standard for energy saving. Provided with integral thermal protection, mounted on sealed for life ball bearings.

Backward curved centrifugal impeller dynamically balanced and directly driven by the motor to provide a smooth airflow through the unit.

Highly efficient **counterflow heat exchanger** to maximise thermal recovery.

FEATURES & BENEFITS

Ease of installation: 243mm height (269mm max., including fixing brackets and drain connection) to overcome shallow ceiling voids.

G4 filters easy removable for cleaning from the outside: no need to remove the access panel. Remote F7 filter cassette on request.

Automatic anti-frost protection to prevent frost building up on the intake side of the heat exchanger.

Two drainage holes to meet climate requirement.

Tested to the latest standards: units are tested in the TÜV Rheinland recognised laboratory at Aeraulika, meaning accurate, up to date information on electrical safety, performance and noise level that can be relied upon.

Unit thermal efficiency, air-leakage and energy efficiency measured at independent laboratory BRE (UK).

Designed and manufactured in accordance with EN60335-2-80 (Low Voltage Directive) and the EMC Directive (Electromagnetic Compatibility).

VERSIONS

QR200 M

- One speed.
- Two speed.
- Variable speed with remote control CTRL-M.
- Variable speed with remote home automation system (BMS) or ballast potentiometer.
- 3 speed with remote control CTRL-S: free-cooling switch included.

QR200 A


The unit is supplied with a multi-function LCD display (CTRL-DSP) for automatic control and convenience, providing:

- 3 speeds setting (adjustable).
- Boost option.
- Holiday mode.
- Night mode: during night time the automatic operation via sensors is deactivated to prevent undesired speed rise and consequent noise increase.
- Airflow balancing.
- Filter replacement and fan failure indicator.
- Working hour counter.
- Setting saving and loading.
- Volt-free contacts for remote ambient sensors (SEN-HY, SEN-PIR, SEN-CO₂).
- Analogic input 1-10V for "slave" function if connected to BMS (home automation) system.
- Integral S/L terminal for boost from remote switch, i.e. light or dedicated switch.
- Connection to remote pre/post heating element.
- Connection to remote dehumidifying element.



CTRL-DSP

Example of a complete ventilation system

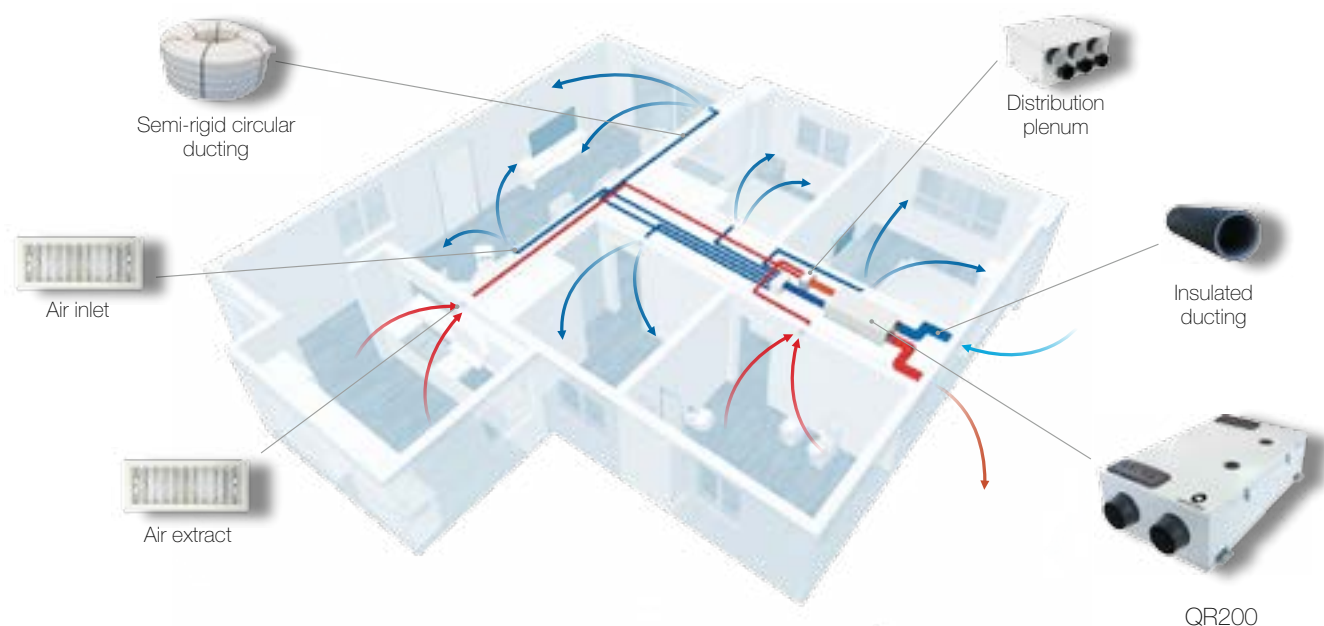



Application: new build.

How it works: a continuous running heat recovery unit (QR200) transfers heat from humid air extracted from wet rooms to warm incoming fresh air which is ducted to habitable rooms. Thanks to the easy-to-fit air distribution system each single ambient can be properly ventilate; the boost function enables rapid extract of increased moisture or pollutant levels. It also provides discrete installation and very quite operation.

Energy saving: the preheated/precooled fresh air and continuous air changes reduce the demand for additional heating/air-conditioning. The EC brushless motors significantly reduce the electricity consumption.

Indoor Air Quality: a correctly specified mechanical ventilation system can ensure the quality of the indoor air is constantly maintained for the health and well-being of the occupants as well as of the building. Duly maintained filters ensure that incoming air is suitably filtered of dust and pollen before it enters the home.

Dimensions (mm) and Weight

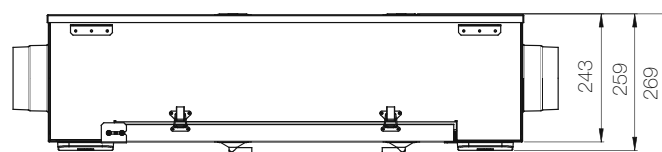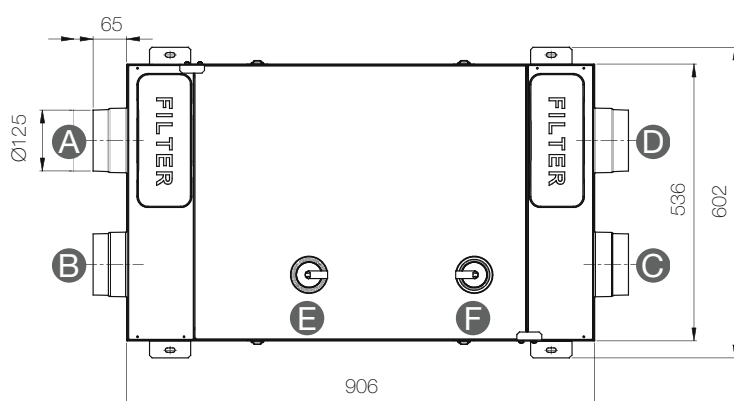

Model	QR200M	QR200A
Weight Kg	19,5	
A	Intake air from outside	
B	Exhaust air to outside	
C	Supply air to inside	
D	Extract air from inside	
E	Winter condensation drainage	
F	Summer condensation drainage	


Article code

Model	QR200M	QR200A
Code	PQR00008	PQR0002Q

QR200


Product fiche - ErP Directive, Regulations 1253/2014 - 1254/2014

a)	Mark	-	AERAULIQA	
b)	Model	-	QR200M	QR200A
c)	SEC class	-	A	
c1)	SEC warm climates	kWh/m ² .a	-15,8	
c2)	SEC average climates	kWh/m ² .a	-40,3	
c3)	SEC cold climates	kWh/m ² .a	-78,7	
	Energy label	-	Yes	
d)	Unit typology	-	Residential - bidirectional	
e)	Type of drive	-	Variable speed drive	
f)	Type of Heat Recovery System	-	Heat recovery	
g)	Thermal efficiency of heat recovery	%	84	
h)	Maximum flow rate @ 100 Pa	m ³ /h	197	
i)	Electric power input (maximum flow rate)	W	105	
j)	Sound power level (L _{WA})	dBA	50	
k)	Reference flow rate	m ³ /h	138	
l)	Reference pressure difference	Pa	50	
m)	Specific power input (SPI)	W/m ³ /h	0,37	
n1)	Control factor	-	0,65	
n2)	Control typology	-	Local demand control	
o1)	Maximum internal leakage rate	%	1	
o2)	Maximum external leakage rate	%	1	
p1)	Internal mixing rate	%	N/A	
p2)	External mixing rate	%	N/A	
q)	Visual filter warning	-	Absent	Visual filter warning on display
r)	Instructions to install regulated grilles	-	N/A	
s)	Internet address for preassembly/disassembly instructions	-	www.aerauliqua.com	
t)	Airflow sensitivity to pressure variations	%	N/A	
u)	Indoor/outdoor air tightness	m ³ /h	N/A	
v1)	AEC - Annual electricity consumption - warm climates	kWh	2	
v2)	AEC - Annual electricity consumption - average climates	kWh	2,4	
v3)	AEC - Annual electricity consumption - cold climates	kWh	7,8	
w1)	AHS - Annual heating saved - warm climates	kWh	20,7	
w2)	AHS - Annual heating saved - average climates	kWh	45,7	
w3)	AHS - Annual heating saved - cold climates	kWh	89,4	
	Ambient temperature max	°C	40	
	Degree of protection IP	-	X4	
	Marking	-	CE	

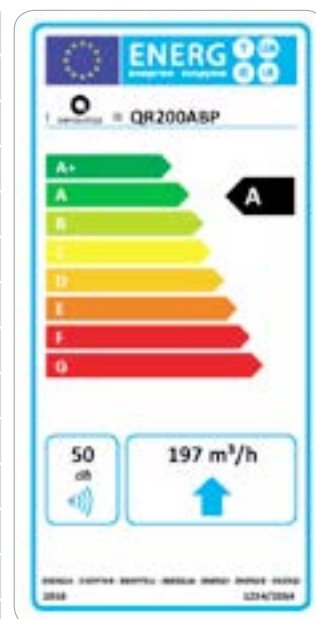

- 220-240 V ~ 50-60Hz
- air performance measured according to ISO 5801 a 230V 50Hz, air density 1,2 Kg/m³
- data measured in the TÜV Rheinland recognised laboratory in Aerauliqua

Performance curve

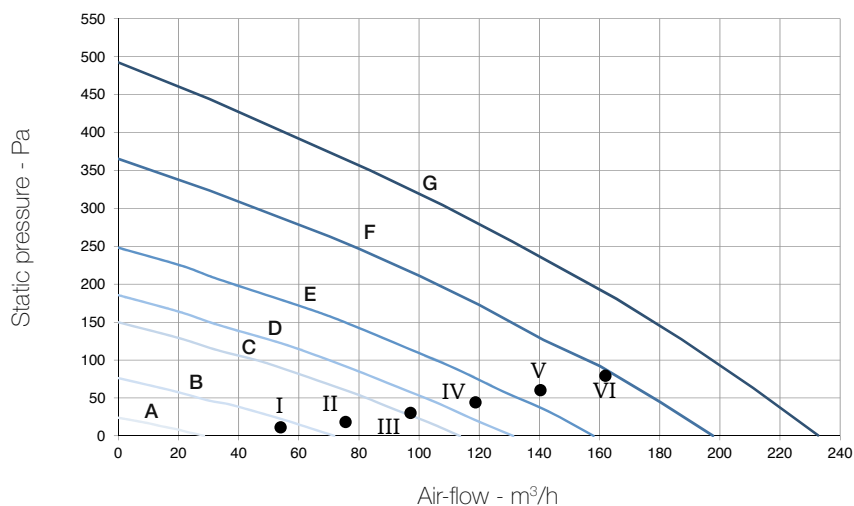

Intake curve according to Reg. 1253/2014 (ErP)

Curve	Speed %	W max	m³/h max
A (min)	20	10	29
B	37	16	72
C	53	28	114
D	59	35	131
E	69	48	158
F	84	75	198
G (max)	100	105	233

Working point	W	m³/h	SPI (W/m³/h)	ηt % ⁽¹⁾
I	12,0	54	0,222	88
II	17,4	76	0,230	86
III	25,6	97	0,263	85
IV	36,7	119	0,309	84
V	50,7	140	0,361	82
VI	70,0	162	0,432	81

(1) Thermal efficiency of the unit

Sound level

Speed 100%		Lw dB - SOUND POWER OCTAVE BAND								Lp dB(A)
		63	125	250	500	1 K	2 K	4 K	8K	Tot @3m
Intake		57	62	69	64	58	56	49	46	71 45
Supply		56	62	65	61	55	50	40	31	68 41
Extract		57	61	65	60	55	49	41	32	68 41
Exhaust		59	64	68	62	57	57	54	47	71 44
Breakout		56	61	64	59	58	50	40	35	68 41
Speed 80%		Lw dB - SOUND POWER OCTAVE BAND								Lp dB(A)
		63	125	250	500	1 K	2 K	4 K	8K	Tot @3m
Intake		55	59	65	60	53	50	44	40	67 41
Supply		55	59	62	57	51	44	35	28	65 37
Extract		55	58	62	55	51	43	35	28	65 37
Exhaust		58	61	65	58	53	52	49	41	68 40
Breakout		55	58	60	55	53	45	35	28	64 37
Speed 60%		Lw dB - SOUND POWER OCTAVE BAND								Lp dB(A)
		63	125	250	500	1 K	2 K	4 K	8K	Tot @3m
Intake		52	55	61	51	45	42	36	31	63 34
Supply		51	54	56	47	42	37	27	25	59 30
Extract		51	54	57	46	42	35	27	23	60 30
Exhaust		52	57	61	49	45	44	40	32	63 34
Breakout		51	54	55	45	44	37	29	24	59 29
Speed 40%		Lw dB - SOUND POWER OCTAVE BAND								Lp dB(A)
		63	125	250	500	1 K	2 K	4 K	8K	Tot @3m
Intake		47	50	50	42	35	32	25	22	54 24
Supply		47	48	48	38	33	27	22	20	53 21
Extract		47	49	48	37	33	25	20	20	53 21
Exhaust		49	51	54	40	36	34	28	23	57 26
Breakout		47	48	46	37	34	30	22	19	52 21

Lp dB(A) @3m for comparative purposes only